

Cuisinart

Digital Folding Probe Thermometer

CSG-466

INSTRUCTIONS

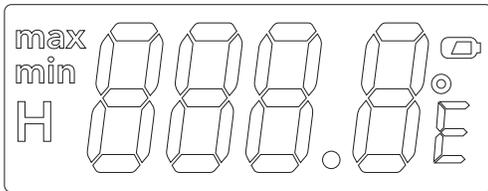


Figure 1: All-functions displaying version

1. MAIN FUNCTIONS

- 4 function buttons: ON/OFF, °F/°C, HOLD, LIGHT
- LED light
- Memory functions for max/min temperature.
- Temperature measurement range: $-40^{\circ}\text{C}\sim+250^{\circ}\text{C}$ or $-104^{\circ}\text{F}\sim+482^{\circ}\text{F}$
- Default temperature setting: °F
- Measurement period: 1 second, temperature resolution: 0.1°F
- Low power detection
- LED Backlight

2. START & RESET

- Remove the silicone shield to access the battery door on the back of the thermometer. Slide the door away to install batteries.
2 AAA – not included
- Power the thermometer on after the batteries are installed, all functions will show on the display for 1 second, and start to measure the environment's temperature. Also, the LED background light on for 5 seconds.
- Default temperature setting: °F (see Figure 1)

3. OPERATIONS

3.1.1 ON/OFF button

- Press the ON/OFF button one time to power on. Press the ON/OFF button one time to power off.

3.1.2 °F/°C button

- Press this button one time to exchange °F/°C.
- After exchange, the degree will not be reserved, it will show °F when you power on again.

3.1.3 HOLD button

- Press this button to show the max tested temperature, press again to show the min tested temperature. press once more back to the current temperature. When showing max/min temperature, if there is no operation within 5 seconds, it will go back to the testing position automatically.

3.1.4 LIGHT button

- Press this button to turn on the LED light, press again to turn off the LED light.

4. FUNCTION DESCRIPTION

4.1.1 Temperature

- Temperature measurement range: $-40^{\circ}\text{C}\sim+250^{\circ}\text{C}$ or $-104^{\circ}\text{F}\sim+482^{\circ}\text{F}$
- Measure period: 1 second, temperature resolution: 0.1°F
- Default temperature setting: °F
- Accuracy: ± 1
- It shows "HI" when the tested temperature over the MAX temperature, it shows "LO" when the tested temperature below the MIN temperature.

4.1.3 Backlight function

- Push the °F/°C or "HOLD" button once, the LED lights on for 5 seconds. When power on, it lights on for 5 seconds.